

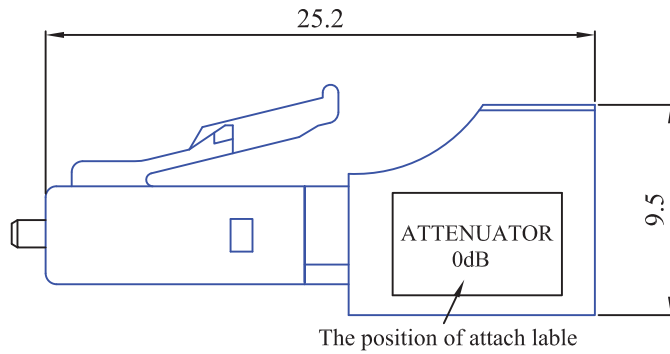


A B C D E F G H


LC/PC Attenuator appearance

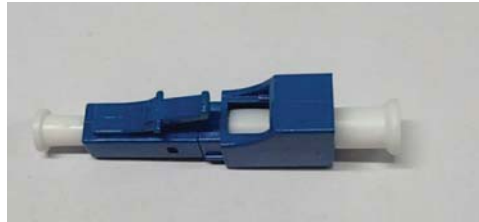

5	Attenuation(dB)	1,3,5,10,15,20,25
	Tolerance(dB)	<5dB±0.5dB <10dB ^{+0.5} _{-10%} ≥10dB ^{+0.8} _{-10%}
	Return loss(dB)	PC>45
	Testing Wavelength(nm)	1310/1550
6	Working Wavelength(nm)	1260~1620
	Working temperature(°C)	-40~+75°C
	Storage temperature(°C)	-40~+80°C

Requirements:

- 1.All parts without damage, crack, smudge and deformation.
- 2.Ferrule without smudge and others.
- 3.Label put in the located position which is smooth, neat and tidy.

Title	LC simplex Attenuator			 HYC Page:1-1
Item number	/	Drawing No.	HYC-LC0300-005	
Drawing	LYX	Date	2016.01.21	
Check	FYY	Version	/	
Approval	LSC	Unit:mm	⊙ □	