




LC DUPLEX CONNECTOR

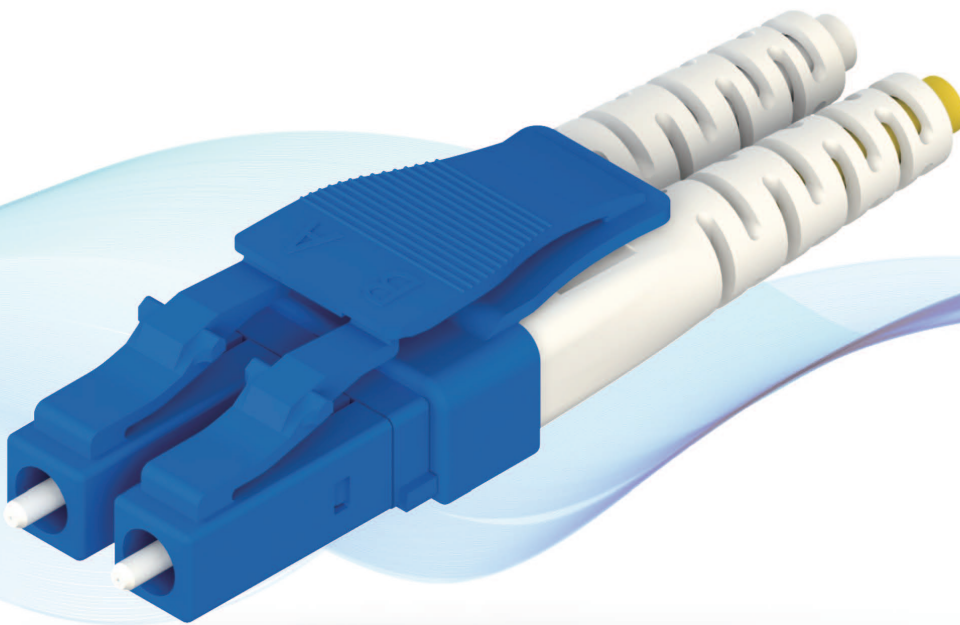

STEP1 Locate the connector




STEP2 Take out the clip, exchange the connector




STEP3 Relocate the clip

Features:

- Easy polarity revisable;
- SM/MM , PC/APC available;
- A customized Logo is optional;
- IEC61754-20 and GR326 complaint;
- RoHs and UL94-V0 inflammability grade complaint;

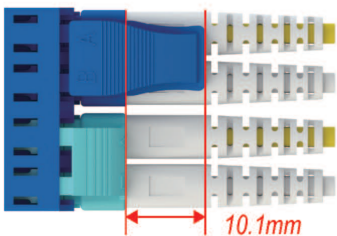

*Longer clip,
more convenient
to release ;*

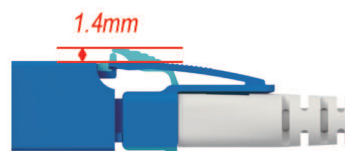

*Lower clip ,
higher density
on panel;*

